

Kitchen Island Light

Contents

Before Use
Important Safety Instructions
Installation Guide
Assembly Instructions
Parts List04
Installation Steps
Operation
Care and Maintenance
Trouble Shooting

Important Safety Instructions

BEFORE INSTALLING FIXTURE, MAKE SURE THEPOWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKERUTILITY BOX.

- · These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of this lighting fixture.
- · We strongly recommend that a professional electrician install all direct wire fixtures.
- The lighting fixture is meant for indoor use. DRY LOCATION ONLY
- · It must be connected only to 3-wire, single-phase electrical supply systems.

(provided with ground wire or equivalent protection system)

For your safety, it is strongly recommended that two people install the lighting fixture.

Warning


To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.

Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.

Keep flammable materials away from lit bulb.

Assembly Instructions


- · Read these instructions carefully and keep for future reference. Refer to parts inventory for guidance, and ensure you have all pieces before starting.
- · When assembling place all parts on a soft, clean, and flatsurface such as a carpet to prevent scratches.





Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.


TOOLS YOU MAY NEED



Note: It is required to be sure as follows before installation

- The light bulbs shall be tested lit before bulbs are assembled and lamp shades are installed.
- · The electric wire length needs to be determined in advance.

Parts List

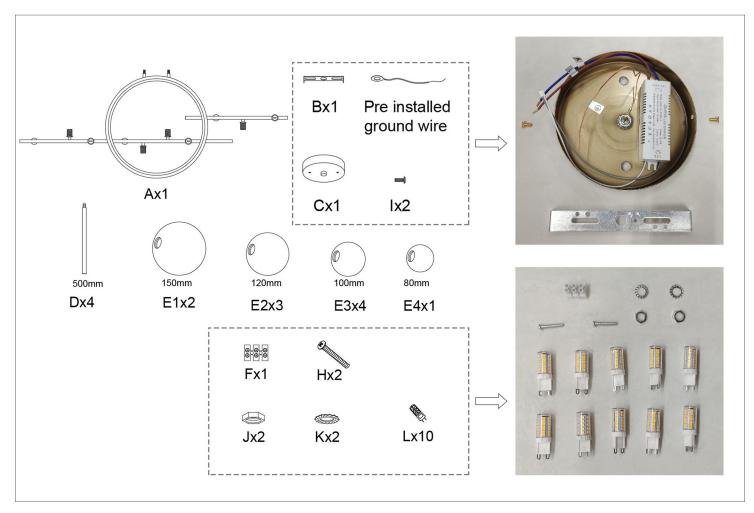


Tips: When accessories are missed, please take a picture in accordance with the above photo, and then contact our customer service.

Installation Steps




Step 1: Please check all parts are complete and fully functional before installation.

If the light rod is skewed during installation, break it straight by hand and then install it.




Step 2: The silicone strip could fall off during transpotation or intallation, please press along the groove to reset.


Installation Steps

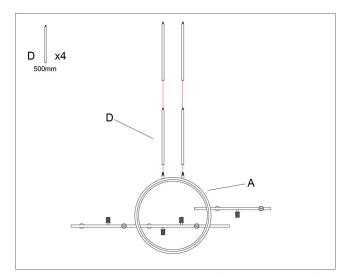


Step 3: Put the wire on A through D and twist D to fix it on A.




Step 5: Punch holes on the ceiling wall with an electric drill, insert the H through the B into the pre installed cable box and tide them finally.




Step 7: After all the bulbs are installed, without the lamp shade wiring, test hanging, lighting up. If not light, it is suggested to re-check the wiring of the previous step. If you need a help, you shall take a picture about the wiring situation and then contact our after-sales service.



Step 4: Use the nut to lock C and D together.




Step 6: As the above picture shown, then can finish the installation of wire, LED strips and driver.

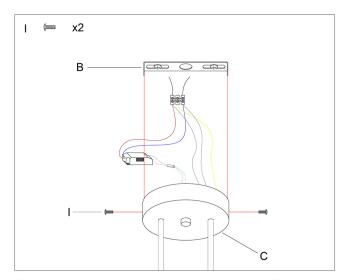

Step 8: Insert the screw (I) into the canopy (C) and fix it on both ends of B.

Installation Steps



Step 9: Ensuring all bulbs (L) and LED light A are light, and fix up all the light shade (E) finally.



Step 10: Successful installation.

Care and Maintenance



WARNING: Before you perform any cleaning or maintenance work, turn off the electricity at the main circuit breaker panel.

- · Wipe the fixture with a damp, soft cloth.
- · Do not use any abrasive cleaners or cleaners that contain alcohol.
- · When replacing bulbs, use 60-watt MAX for E26/27 bulb and E12/14 bulb, 40-watt MAX for G9 bulb, 20-watt MAX for G4 bulb.

Troubleshooting

Problem	Possible Cause	Solution
The light will not turn on.	A bulb is burned out.	Replace the bulb.
	The power is off.	Ensure the power supply is on.
	There is a faulty wire connection.	Check the wiring. Contact a qualified and licensed electrician if you are not capable to solve wiring problems.
	There is a faulty switch.	Test or replace the switch.
The fuse blows or the circuit breaker trips when the light is turned on.	There are crossed wires or the power wire is grounding out.	Discontinue use of the fixture. Check the wire connections or contact a qualified electrician.
Strobe	Drive Failure	Contact our after-sales service, may need to replace the driver.
	Wiring Error	Rewire according to the manual.
	Light Source Failure	Replace the light source, if the problem can not be ruled out, please contact customer service.
Abnormal noise	Drive Failure	Contact our after-sales service, may need to replace the driver.