


**Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.**

This light should be installed by a licensed electrician

## LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws.
3. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
4. Install back plate to mounting plate, tighten with back plate screws.
5. Install 60W T10 medium base bulb (not included).
6. Insert thumb screw through hole in bracket. Place silicone washer 1 and clear beveled glass on thumb screw. Tighten with silicone washer 2 and cap nut.
7. Restore power to the fixture.

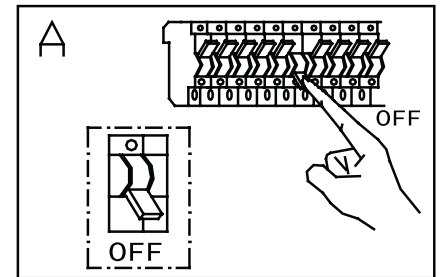

## CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.
- Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

